


2ENTRY Helios modular system

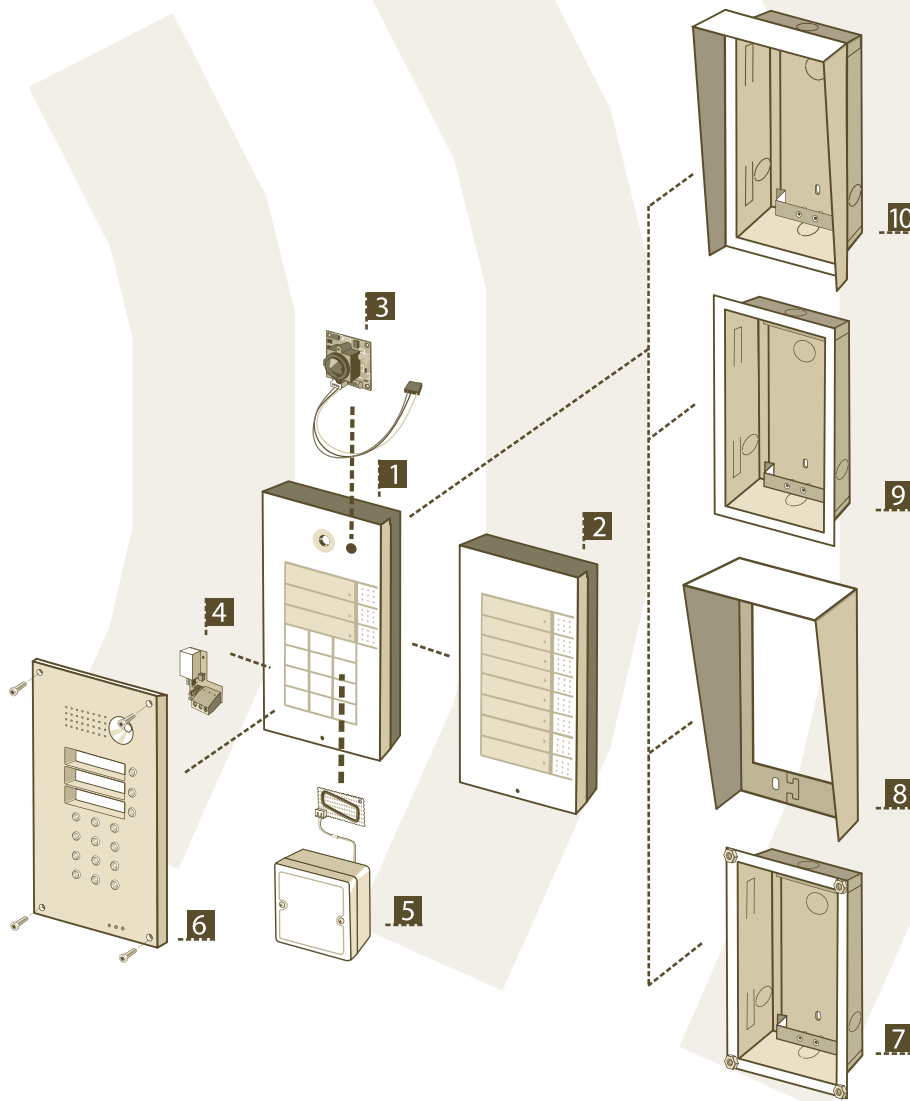

- 1. Basic module
 - 3 buttons
 - 6 buttons
 - 3 buttons and keypad
 - 6 buttons and keypad
- 2. Extender
 - 8 buttons
 - 16 buttons
 - infopanel without buttons
- 3. Video camera
- 4. Additional switch
- 5. Card reader
- 6, 7. Anti-vandal mask,
Box for masonry fitting
 - for basic module
 - for basic module and keypad
 - for extender
- 8. Roofs
 - for 1 module
 - for 2 modules
- 9. Flush fixed box
 - for 1 module
 - for 2 modules
- 10. Roof and box for masonry fitting
 - for 1 module
 - for 2 modules

Technical parameters

2ENTRY Helios			
Number of buttons	1-54	Cover	External environment with sufficient rain protection
Connection with PBX	FXS – (internal) analogue telephone line according to standards CCITT	Operational temperature range	-20 - +60 °C
Power supply	From telephone line	Switch – max. voltage/current	max. 48 V/1 A AC
DC voltage drop (off-hook)	< 8 V (I=25 mA) < 16 V (I=50 mA)	Dimensions (1 module)	210 x 100 x 29 mm (H x W x D)
Dialling	impulse/tone	Weight	max. 500 g
Backlight – rated voltage	12 V	Coverage	IP 53